



FinishLine™ XL

Large Diameter Adjustable Drainage System with PVC Connection



Sioux Chief has expanded its FinishLine XL Floor Drains and Cleanouts with new 4" and 6" PVC connection options, providing greater flexibility for a wide range of commercial and heavy-duty applications.

Cleanouts are available in three durable finish options:

Nickel Bronze Stainless Steel Cast Iron

Floor Drains are available in three durable finish options:

Nickel Bronze Stainless Steel Cast Iron Special Duty*

The 832-SD9 drop-in Cast Iron strainer, engineered with a special duty 15,000 lb load rating, is ideal for environments subject to heavy traffic and extreme loads.

Pre-Pour Adjustment Only - Drops Directly Into Coring Sleeve

The FinishLine XL system continues to deliver on durability, versatility, and long-term performance, now with more connection options to meet job-site requirements.



Consider Sioux Chief your *Total Project Source*
Scan to Email us: *Customerservice@LsiReps.com*

Supply

Drainage

Support

Specialties

www.siouxchief.com

Represented By

Lowder Sales Inc.

WWW.LSIREPS.COM



ADJUSTABLE ON-GRADE FLOOR DRAIN

» 832 SERIES

FinishLine™

SPECIFICATION

Sioux Chief 832 series FinishLine adjustable floor drain shall be used where necessary in drainage systems. Floor drain shall allow adjustment before and AFTER the concrete pour. Strainer shall be heel-resistant and meet applicable load requirements for intended use. Trap primer port shall be threaded 1/2" FIP for optional connection. Designed in accordance with ASME A112.6.3

MATERIALS

Ring/Strainer: Nickel-bronze, 304 stainless steel

Coring plug: High-impact polymer

Head adapter/Coring sleeve: Ductile iron

Base adapter: Ductile iron, PVC

STRAINER LOAD RATING

Nickel-bronze: 750 lbs. (Light duty)

Stainless steel: 1,500 lbs. (Light duty)

STRAINER FREE AREA

30.0 in²

DIMENSIONS

A: Connection	4"	6"
B: Base adapter height ¹	4-1/2"	5-3/8"
C: Pre-pour height ¹	5-3/8" – 6-7/8"	6-1/4" – 7-3/4"
D: Top diameter	9"	
E: After-pour adjustment	0" – 1-1/2"	
F: Trap primer port	1/2" FIP thread - plugged	

1 Add 3/4" for 4" PVC base adapter. Add 1-3/8" for 6" PVC base adapter.

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____




832-49DNR



832-49DFP
4" ROUGH-IN w/ PVC ADAPTER

AVAILABLE AS ROUGH-IN OR COMPLETE FINISHLINE ASSEMBLY WITH 4" OR 6" PVC ADAPTER

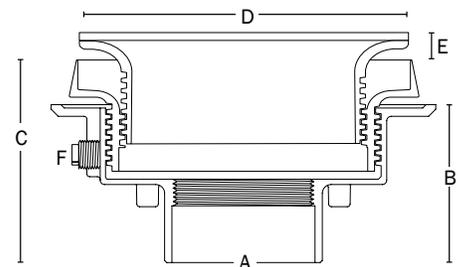

Create Item Number

832-ABC

e.g. **832-49DNRC:** FinishLine floor drain with 4" No-Hub connection, nickel-bronze ring/strainer, and cast iron clamping collar

CONNECTION SIZE **A**

49D = 4" No-Hub

6D = 6" No-Hub

RING/STRAINER **B**

NR = Nickel-bronze

SR = Stainless steel

OPTIONS **C**

V = Vandal-resistant strainer screws

C = Cast iron clamping collar

P = PVC Base adapter²

Accessories - Available Separately:

832-SD9: Loose-set ductile iron special-duty grate³

832-WCQ: Flexible locating bristles kit

832-PCQ: Coring plug wrench

863-FACQ: Round aluminum condensate funnel

863-FNCQ: Round nickel-bronze condensate funnel

863-FNOCQ: Oval nickel-bronze condensate funnel

² PVC Base adapter has Sch. 40 hub connection | ³ Grate for use with FinishLine rough-in fixture. Sets into coring sleeve in place of finish fixture